




GDF46-18Z/3.5 220V Outline diagram

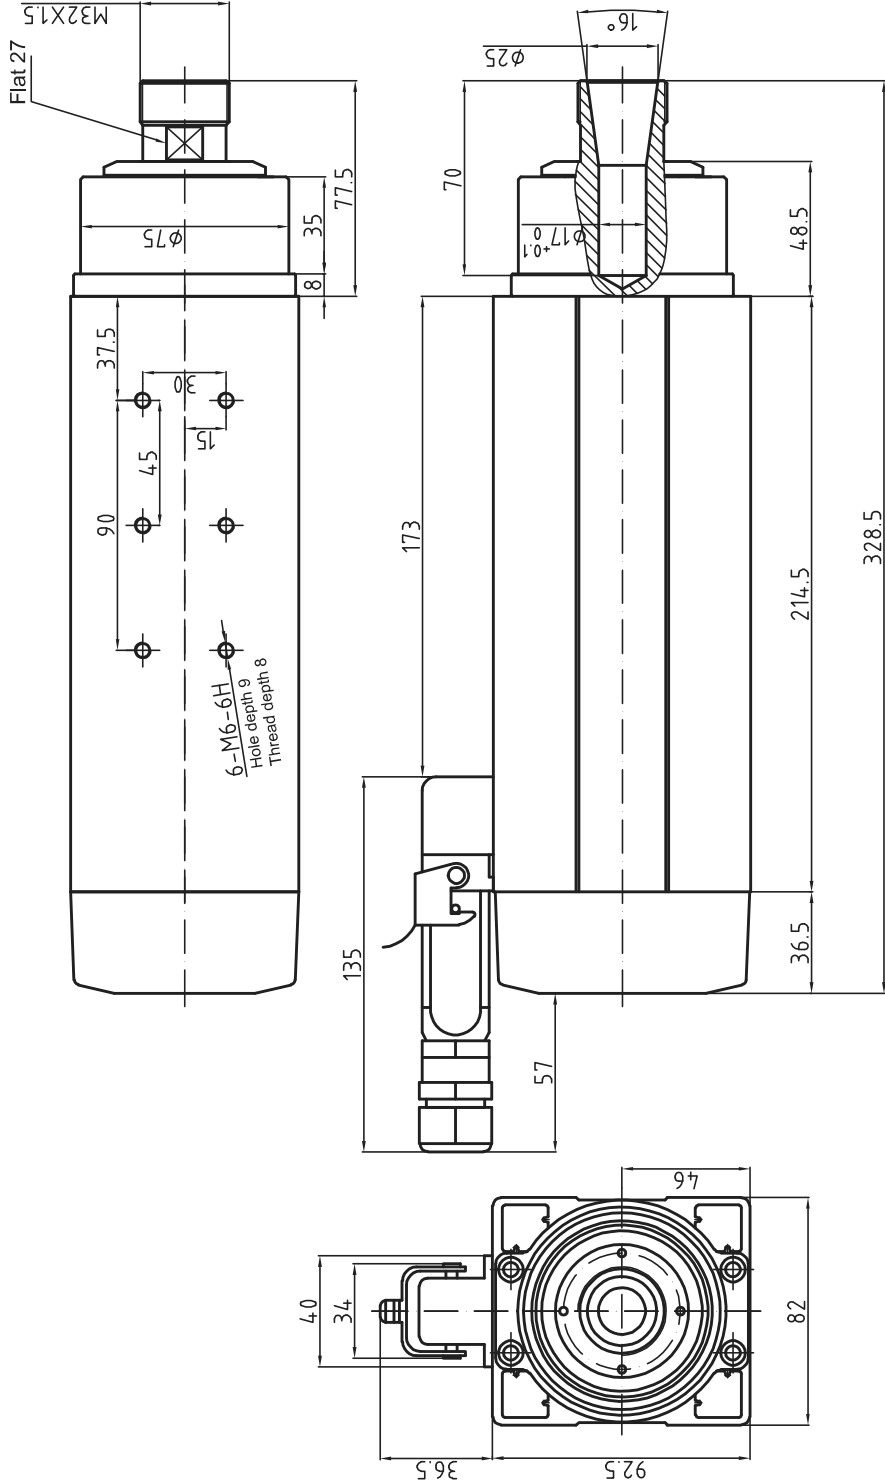

GDF46-18Z/3.5

Power	3.5 kw	Weight: 8KG
Voltage	220 V	ER nut: ER25
Current	12.0 A	Cooling method: air cooling
Frequency	300 Hz	Bearing lubrication method: grease lubrication
Rotating speed	18000 r/min	High-precision angular contact ball bearing: 2×7007C P4/2×7002C P4

Rotating direction: anticlockwise from the shaft extension end
Special attention: thread locking adhesive shall be applied or the spring washer shall be added to prevent the looseness during the installation of the fastening screw!

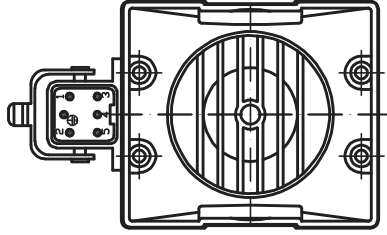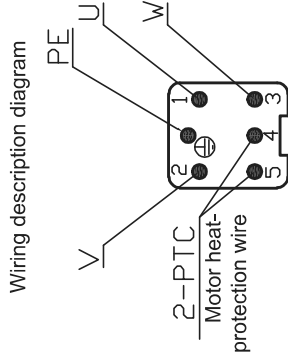

PTC single-core thermistor parameter	
DC power supply	Maximum DC25V/100mA
-20~25℃	≤100 Ω
≤90℃	≤250 Ω
105℃	≤550 Ω
110℃	Rated operating temperature
115℃	≥1330 Ω
≥125℃	≥4 K Ω
≤160℃	Maximum storage temperature