


Hybrid Stepper Motor

KL23H251-28-4A

Rev: 1.0

Date:20150324

UNIT=mm

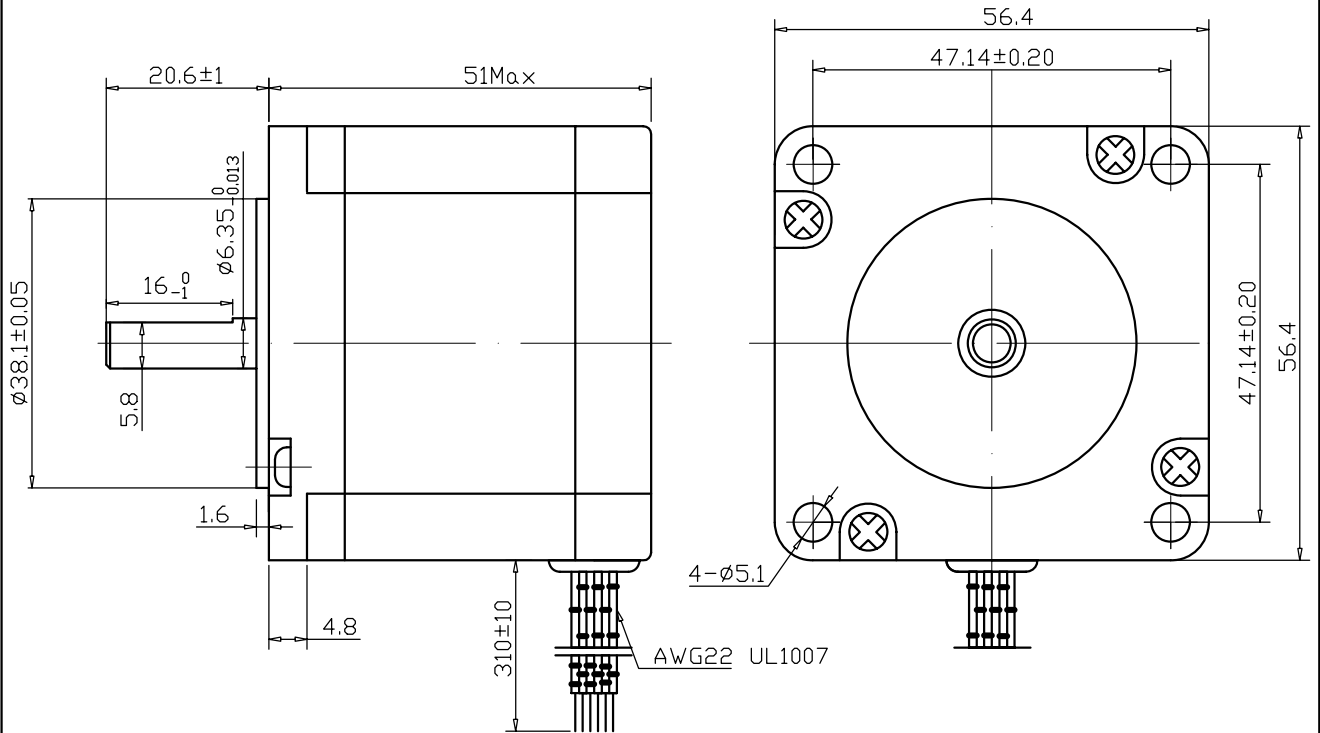

COMMON RATINGS

Temperature rise: 80°C

Insulating class: B

Radial play: 0.025mm max. (load 450g)

Dielectric strength: 500VDC

Insulation resistance: 100M Ω (500VDC)

MODEL	PHASES	STEP ANGLE	RATED VOLTAGE	CURRENT /PHASE	RESISTANCE /PHASE	INDUCTANCE /PHASE	HOLDING TORQUE	ROTOR INERTIA	WEIGHT
		DEC /STEP	V	A	$\Omega \pm 10\%$ (20°C)	mH±20%	oz-IN	g.cm	Kg
	2	1.8	2.3	2.8	0.83	2.2	140	220	0.62

