
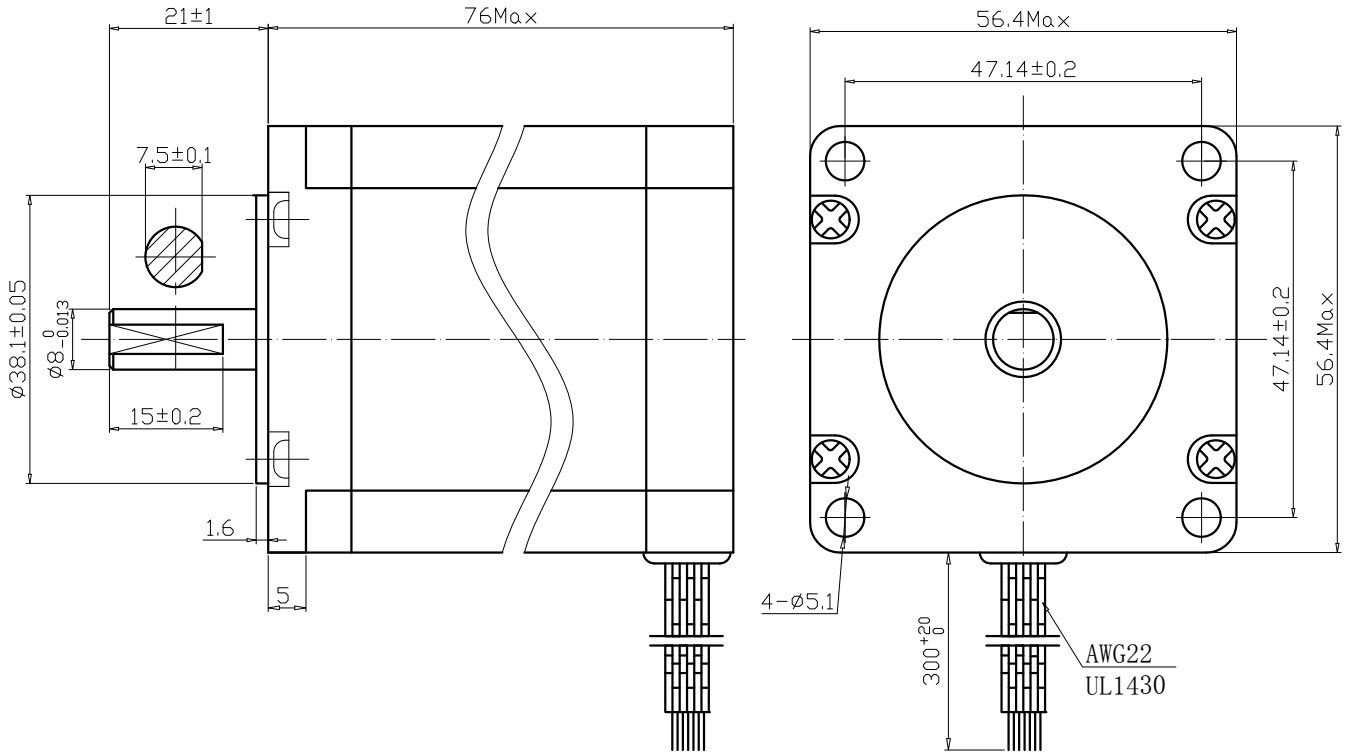


A B C D E F G H

XXXX



SPECIFICATIONS

1	Number of Phase	2
2	Step Angle	1.8° ±5%
3	Holding Torque	20.4Kg. m
4	Voltage	3.6VDC
5	Current	3.0A
6	Phase Resistance (20°C)	1.2Ω ±10%
7	Phase Inductance (1KHz)	4.7mH±20%
8	Rotor Inertia	g • cm ²
9	Insulation Resistance	100MΩ 500VDC
10	Insulation Class	B (130°C)
11	Ambient Temperature	-20°C to 50°C
12	Ambient Humidity	15% to 95%
13	Motor Weight	Approx xx kg
14		

EXITING SEQUENCE (2 PHASE)

STEP	A	B	\bar{A}	\bar{B}	
1	+	+	-	-	CCW
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	CW

NOTE: This document is released for information only. Its reproduction in whole or in part or its dissemination to third parties is prohibited. Unless otherwise specified all trademarks and registered trademarks appearing on this document are the property of changzhou chuangwei motor & electric apparatus co.,ltd.

Unit:mm
 First angle method
 Tolerances for linear and angular dimensions without individual tolerance indications GB/T 1804-m eqv ISO 2768-1:m
 Geometrical tolerances for features without individual tolerance indications GB/T 1184-k eqv ISO 2768-2:k

DESIGN	20.09.27
CHECK	
TECHNOLOGY	
STANDARD	
APPROVE	
NAMES	SINGATURE
DATE	

TYPE: HYBRID STEPPING MOTOR SCALE xx Rev. 1.0 SHEET 1 OF 1

Model: KL23H276-30-4AN

A B C D E F G H